





**RG 58 Drop Cable**

<b>Inner Conductor</b>	Mat. Diam.	Tin-copper wires 19×0.18mm+/-0.01mm
<b>Dielectric Core</b>		solid PE
	Diam.	2.95mm, +/-0.01mm
<b>Braid</b>		Tinned Copper
	Form	16×0.12mm+/-0.01mm
	Lay	56mm
	Coverage	>60%
<b>Jacket</b>		PVC (white or black)
	Diam	4.95mm+/-0.10mm
<b>Impedance</b>		50 Ωm+/-2 Ωm

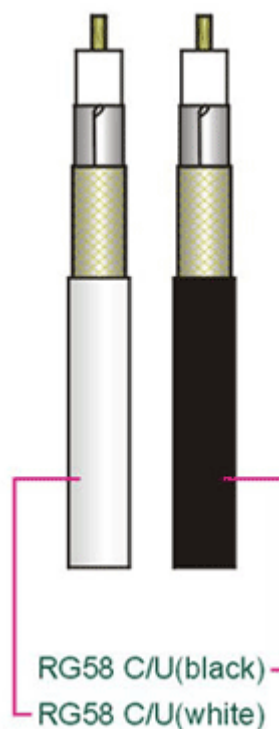

<b>Nominal Caacitance</b>		66.5pF/m+/-3pF/m
<b>Velocity Ratio</b>		82%+/-4%
<b>Screening Efficiency</b>	100-900MHZ	>60dB
<b>Sheath Tension Test</b>		2.0KV

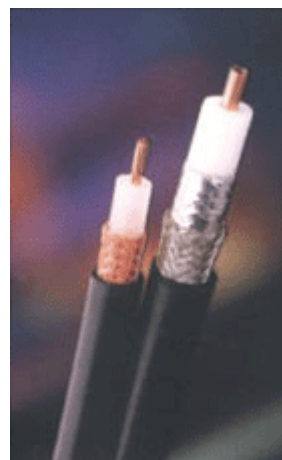

Nominal Attenuation	
50MHZ	11. 3dB/100M
200MHZ	23. 5dB/100M
500MHZ	38. 7dB/100M
800MHZ	52. 5dB/100M
1000MHZ	58. 1dB/100M

